



Anamet galvanised steel fittings for Sealite.

The galvanised steel Anamet fittings can be used with all types of Anaconda Sealite (except CNP) and are particularly used where a wider temperature range is required (for instance with type HCX). Because of the UL & CSA approvals the fittings are also suitable for export projects outside Europe.

Material & Construction:

Construction: Galvanised steel fitting, consisting of 3 parts (counter nut, ferrule and body).

Material: Counter nut, ferrule and body are galvanised steel. Inserts are made from PA6 (green for ISO metric, blue for Pg and white for NPT).

Special approvals: UL-514B (file # E 14814) and CSA C22.2 (file # 65178).

Suitable for use in hazardous environments according to NEC 501-4B Class I, Division 2; Class II, Division 1 and 2; Class III, Division 1 and 2.


Temperature: -55 °C till +300 °C continuous.

Protection class: IP 67 (dust-proof, water-tight).

Colour: Metal.

ANAMET FITTINGS


LIQUID-TIGHT FITTINGS FOR SEALTITE IP 67



ISO straight fitting, male, galvanised steel.




Thread	Sealite Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M16 x 1,5	3/8"	9,7	37	15	26	-	24	25	295.012.0	6,4
M20 x 1,5	1/2"	13,7	37	15	29	-	27	25	295.016.0	6,8
M25 x 1,5	3/4"	18,8	38	15	35	-	33	25	295.020.0	10,0
M32 x 1,5	1"	24,2	44	18	42	-	40	10	295.026.0	15,0



ISO 45° fitting, male, galvanised steel.



Thread	Sealite Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M16 x 1,5	3/8"	9,7	22	15	26	29	27	25	295.412.0	7,8
M20 x 1,5	1/2"	13,7	24	15	29	29	27	25	295.416.0	8,2
M25 x 1,5	3/4"	18,8	27	15	35	32	32	10	295.420.0	16,8
M32 x 1,5	1"	24,2	30	18	42	37	40	5	295.426.0	21,6




ISO 90° fitting, male, galvanised steel.



Thread	Sealite Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
M16 x 1,5	3/8"	9,7	32	15	26	34	27	25	295.912.0	10,0
M20 x 1,5	1/2"	13,7	33	15	29	38	27	25	295.916.0	10,6
M25 x 1,5	3/4"	18,8	37	15	35	44	34	10	295.920.0	21,4
M32 x 1,5	1"	24,2	44	18	42	51	40	5	295.926.0	25,6




Pg straight fitting, male, galvanised steel.



Thread	Seallite	Min. Internal	Dimensions in mm					Standard	Article	Weight
Pg	Size (inch)	Bore (mm)	A	B	C	D	E	Package	Number	(Kg/100)
Pg 11	3/8"	9,7	37	15	26	-	24	25	299.011.0	6,8
Pg 13,5	3/8"	10,4	37	15	26	-	24	25	299.013.0	6,8
Pg 16	1/2"	13,7	38	15	29	-	27	25	299.016.0	7,2
Pg 21	3/4"	18,8	38	15	35	-	33	25	299.020.0	10,8
Pg 29	1"	24,2	44	18	42	-	40	5	299.026.0	15,6
Pg 36	1.1/4"	31,6	54	18	56	-	55	5	299.035.0	38,4
Pg 42	1.1/2"	36,8	62	18	64	-	61	2	299.040.0	56,0
Pg 48	2"	48,0	64	18	77	-	77	1	299.050.0	68,0




Pg 45° fitting, male, galvanised steel.



Thread	Seallite	Min. Internal	Dimensions in mm					Standard	Article	Weight
Pg	Size (inch)	Bore (mm)	A	B	C	D	E	Package	Number	(Kg/100)
Pg 11	3/8"	9,7	22	15	26	29	27	25	299.411.0	8,2
Pg 13,5	3/8"	10,4	22	15	26	29	27	25	299.413.0	8,2
Pg 16	1/2"	13,7	24	15	29	29	27	25	299.416.0	8,2
Pg 21	3/4"	18,8	27	15	35	32	32	10	299.420.0	13,6
Pg 29	1"	24,2	33	18	42	37	-	5	299.426.0	22,4
Pg 36	1.1/4"	31,6	38	18	56	46	-	5	299.435.0	46,4
Pg 42	1.1/2"	36,8	44	18	64	55	-	2	299.440.0	63,0
Pg 48	2"	48,0	51	18	77	58	-	1	299.450.0	106,0




Pg 90° fitting, male, galvanised steel.



Thread	Seallite	Min. Internal	Dimensions in mm					Standard	Article	Weight
Pg	Size (inch)	Bore (mm)	A	B	C	D	E	Package	Number	(Kg/100)
Pg 11	3/8"	9,7	32	15	26	36	27	25	299.911.0	10,6
Pg 13,5	3/8"	10,4	32	15	26	36	27	25	299.913.0	10,6
Pg 16	1/2"	13,7	33	15	29	38	27	25	299.916.0	11,0
Pg 21	3/4"	18,8	37	15	35	44	34	10	299.920.0	17,8
Pg 29	1"	24,2	44	18	42	51	39	5	299.926.0	28,4
Pg 36	1.1/4"	31,6	44	18	56	61	-	5	299.935.0	52,0
Pg 42	1.1/2"	36,8	62	18	64	81	-	2	299.940.0	72,0
Pg 48	2"	48,0	69	18	77	91	-	1	299.950.0	124,0



NPT straight fitting, male, galvanised steel (Including lock nut).




Thread	Seallite	Min. Internal	Dimensions in mm					Standard	Article	Weight
NPT	Size (inch)	Bore (mm)	A	B	C	D	E	Package	Number	(Kg/100)
NPT 1/2"	3/8"	10,4	37	15	26	-	24	25	298.012.0	6,8
NPT 1/2"	1/2"	13,7	37	15	29	-	27	25	298.016.0	7,3
NPT 3/4"	3/4"	18,8	38	15	35	-	33	25	298.020.0	10,6
NPT 1"	1"	24,2	44	18	42	-	40	5	298.026.0	15,6
NPT 1.1/4"	1.1/4"	31,6	54	18	56	-	55	5	298.035.0	18,4
NPT 1.1/2"	1.1/2"	36,8	60	18	64	-	61	2	298.040.0	27,0
NPT 2"	2"	48,0	64	18	77	-	77	1	298.050.0	78,0
NPT 2.1/2"	2.1/2"	58,5	86	27	92	-	-	1	298.063.0	154,0
NPT 3"	3"	72,0	94	30	108	-	-	1	298.075.0	206,0
NPT 4"	4"	95,0	102	32	133	-	-	1	298.099.0	298,0



ANAMET FITTINGS


LIQUID-TIGHT FITTINGS FOR SEALTITE IP 67

NPT 45° fitting, male, galvanised steel (including lock nut).




Thread	Sealtite Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
NPT 1/2"	3/8"	10,4	22	15	26	29	24	25	298.412.0	8,2
NPT 1/2"	1/2"	13,7	24	15	29	29	27	25	298.416.0	8,2
NPT 3/4"	3/4"	18,8	27	15	35	32	32	25	298.420.0	13,6
NPT 1"	1"	24,2	30	18	42	37	-	5	298.426.0	22,4
NPT 1.1/4"	1.1/4"	31,6	38	18	56	46	-	5	298.435.0	46,4
NPT 1.1/2"	1.1/2"	36,8	44	18	64	55	-	2	298.440.0	73,0
NPT 2"	2"	48,0	51	18	77	58	-	1	298.450.0	106,0
NPT 2.1/2"	2.1/2"	58,5	91	27	92	91	-	1	298.463.0	346,0
NPT 3"	3"	72,0	110	30	108	110	-	1	298.475.0	450,0
NPT 4"	4"	95,0	118	32	133	118	-	1	298.499.0	820,0

NPT 90° fitting, male, galvanised steel (including lock nut).

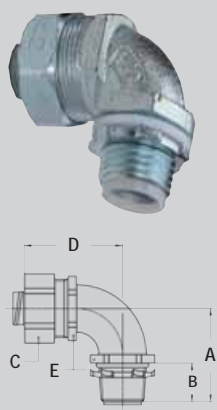


Thread	Sealtite Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
NPT 1/2"	3/8"	10,4	32	15	26	36	27	25	298.912.0	10,6
NPT 1/2"	1/2"	13,7	32	15	29	36	27	25	298.916.0	11,0
NPT 3/4"	3/4"	18,8	37	15	35	44	34	10	298.920.0	17,2
NPT 1"	1"	24,2	44	18	42	51	40	5	298.926.0	26,4
NPT 1.1/4"	1.1/4"	31,6	46	18	56	58	-	5	298.935.0	52,8
NPT 1.1/2"	1.1/2"	36,8	62	18	64	81	-	2	298.940.0	87,0
NPT 2"	2"	48,0	67	18	77	91	-	1	298.950.0	128,0
NPT 2.1/2"	2.1/2"	58,5	183	27	92	215	-	1	298.963.0	382,0
NPT 3"	3"	72,0	220	30	108	258	-	1	298.975.0	500,0
NPT 4"	4"	95,0	287	32	133	327	-	1	298.999.0	980,0

NPT straight fitting, female, galvanised steel.

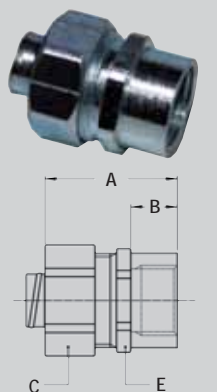


Thread	Sealtite Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
NPT 1/2"	3/8"	10,4	33	11	26	-	24	25	298.612.0	5,9
NPT 1/2"	1/2"	13,7	34	11	29	-	27	25	298.616.0	6,4
NPT 3/4"	3/4"	18,8	36	12	35	-	33	25	298.620.0	9,6
NPT 1"	1"	24,2	42	15	42	-	40	5	298.626.0	14,0

STN straight boxconnector fitting, galvanised steel.

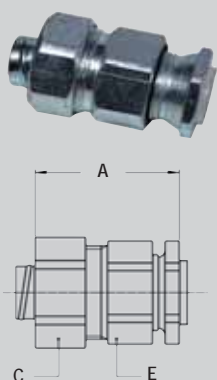

For hole Min. - Max.	Sealtite Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
22 - 25	3/8"	10,4	37	-	26	-	26	25	298.212.0	8,2
22 - 25	1/2"	13,7	37	-	29	-	27	25	298.216.0	9,1
28 - 31	3/4"	18,8	40	-	35	-	34	25	298.220.0	13,8
34 - 37	1"	23,8	45	-	42	-	40	5	298.226.0	18,8
43 - 47	1.1/4"	31,6	67	-	56	-	57	5	298.235.0	56,8
49 - 53	1.1/2"	36,8	67	-	64	-	68	2	298.240.0	84,0
61 - 66	2"	48,0	59	-	77	-	-	1	298.250.0	128,0

STN 90° boxconnector fitting, galvanised steel.



For hole	Seallite	Min. Internal	Dimensions in mm					Standard	Article	Weight
Min. - Max.	Size (inch)	Bore (mm)	A	B	C	D	E	Package	Number	(Kg/100)
22 - 25	3/8"	10,4	-	-	26	-	-	25	298.812.0	9,6
22 - 25	1/2"	13,7	-	-	29	-	-	25	298.816.0	13,8
28 - 31	3/4"	18,8	-	-	35	-	-	10	298.820.0	16,4
34 - 37	1"	23,8	-	-	42	-	-	5	298.826.0	36,4

Lock nuts, NPT, galvanised steel, with "Tiger Grip".




Thread	Seallite	Min. Internal	Dimensions in mm					Standard	Article	Weight
NPT	Size (inch)	Bore (mm)	A	B	C	D	E	Package	Number	(Kg/100)
NPT 1/2"	-	-	-	-	-	-	-	100	297.416.0	0,3
NPT 3/4"	-	-	-	-	-	-	-	100	297.420.0	0,3
NPT 1"	-	-	-	-	-	-	-	50	297.426.0	0,3
NPT 1.1/4"	-	-	-	-	-	-	-	50	297.435.0	0,4
NPT 1.1/2"	-	-	-	-	-	-	-	50	297.440.0	0,5
NPT 2"	-	-	-	-	-	-	-	25	297.450.0	0,7

Neoprene ring for NPT, with galvanised steel back plate.



Thread	Seallite	Min. Internal	Dimensions in mm					Standard	Article	Weight
NPT	Size (inch)	Bore (mm)	A	B	C	D	E	Package	Number	(Kg/100)
NPT 1/2"	-	-	-	-	-	-	-	100	297.016.0	0,5
NPT 3/4"	-	-	-	-	-	-	-	100	297.020.0	0,5
NPT 1"	-	-	-	-	-	-	-	50	297.026.0	0,6
NPT 1.1/4"	-	-	-	-	-	-	-	50	297.035.0	0,8
NPT 1.1/2"	-	-	-	-	-	-	-	50	297.040.0	1,4
NPT 2"	-	-	-	-	-	-	-	50	297.050.0	1,4

Grounding ferrule, galvanised steel.




Thread	Seallite	Min. Internal	Dimensions in mm					Standard	Article	Weight
	Size (inch)	Bore (mm)	A	B	C	D	E	Package	Number	(Kg/100)
-	3/8"	10,4	-	-	-	-	-	50	297.212.0	1,3
-	1/2"	13,7	-	-	-	-	-	25	297.216.0	1,3
-	3/4"	18,8	-	-	-	-	-	25	297.220.0	1,4
-	1"	24,2	-	-	-	-	-	25	297.226.0	1,8
-	1.1/4"	31,6	-	-	-	-	-	5	297.235.0	2,0
-	1.1/2"	36,8	-	-	-	-	-	5	297.240.0	2,4
-	2"	48,0	-	-	-	-	-	5	297.250.0	2,8
-	2.1/2"	58,5	-	-	-	-	-	5	297.263.0	6,4
-	3"	72,0	-	-	-	-	-	5	297.275.0	7,2
-	4"	95,0	-	-	-	-	-	1	297.299.0	7,6

ANAMET
FITTINGS

ACCESSORIES



Wire mesh, strain relief.



Thread	Sealtite Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
-	3/8"	-	-	-	26	-	-	20	297.312.0	2,5
-	1/2"	-	-	-	29	-	-	20	297.316.0	5,0
-	3/4"	-	-	-	35	-	-	20	297.320.0	7,5
-	1"	-	-	-	42	-	-	20	297.326.0	8,5
-	1.1/4"	-	-	-	56	-	-	10	297.335.0	10,0
-	1.1/2"	-	-	-	64	-	-	10	297.340.0	12,0
-	2"	-	-	-	77	-	-	5	297.350.0	14,0



Nut with external grounding.



Thread	Sealtite Size (inch)	Min. Internal Bore (mm)	Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
			A	B	C	D	E			
-	3/8"	-	-	-	26	-	-	25	297.512.0	-
-	1/2"	-	-	-	29	-	-	25	297.516.0	-
-	3/4"	-	-	-	35	-	-	10	297.520.0	-
-	1"	-	-	-	42	-	-	5	297.526.0	-
-	1.1/4"	-	-	-	56	-	-	5	297.535.0	-
-	1.1/2"	-	-	-	64	-	-	2	297.540.0	-
-	2"	-	-	-	77	-	-	1	297.550.0	-

**ANAMET
FITTINGS**

ACCESSORIES